

Product Description

The AnD7220 Adaptable PMIC uses AnDAPT AmP™ advanced technology consisting of fully flexible digital fabric combined with high performance analog blocks. The AnD7220 consists of one configurable DrMOS Controller, one 10A high current Synchronous Buck Regulator, one 6A Synchronous Buck Regulator and two high current LDOs. The AnD7220 is fully tested and ready to use in designs. The AnD7220 Buck regulators use Voltage Mode control. The AnD7220 also has an integrated sequencer and 4 additional auxiliary LDOs. The user can modify output voltage and rail sequencing using resistor or WebAdapter™ online tools. The sequencer has the capability to be based on timed delays or Power Good signals. Adaptable PMICs provide fastest prototyping and time to market, while providing best in class performance and flexibility. The AnD7220 design is available in the WebAmP™ software tool library for full customization capability. The Adaptable PMIC is optimized to power high end Processors by integrating multiple power rails into single chip designs.

Features

- DrMOS Controller 30A: 0.72 0 1.8V
- 10A High Current Synch Buck 0.72 0 5.0V
- 6A Synch Buck 0.72 0 5.0V
- Protection: UVLO, OCP, OVP, OTP
- Two 1A LDO (V_{OUT}: 0.6V to 3.3V)
- Four auxiliary LDOs: 1.2V, 1.8V, 2.5V, 3.3V internal input voltage 4.75V, or external 5V up to 200mA output current
- Adjustable output voltage with 2.4 mV resolution
- 1% load regulation
- Buck efficiency up to 95%
- Power-good flag output and Enable input
- Soft start/stop, sequencing, pre-bias startup
- -40°C to +125°C operating junction temperature
- Easy WebAmP upgrade path to On-Demand PMIC


Applications

- On-demand power management, multi-rail power integration
- Powering server, processor, memory, storage, network switcher and router platforms
- Powering FPGA, processor, SSD, subsystem power control & sequencing

Product Detail

The AnD7220 Adaptable PMIC consists of one customizable, DrMOS Controller, two customizable Synchronous Buck Regulators, customizable control and status pins including enable input, an optional power-good output, and optional output flags to signal when the system triggers an overvoltage (OVP), overcurrent (OCP), or undervoltage lockout (UVLO) condition. It also includes four high current LDOs.


DrMOS Controller & Dual Synch Buck WebAmP Design View

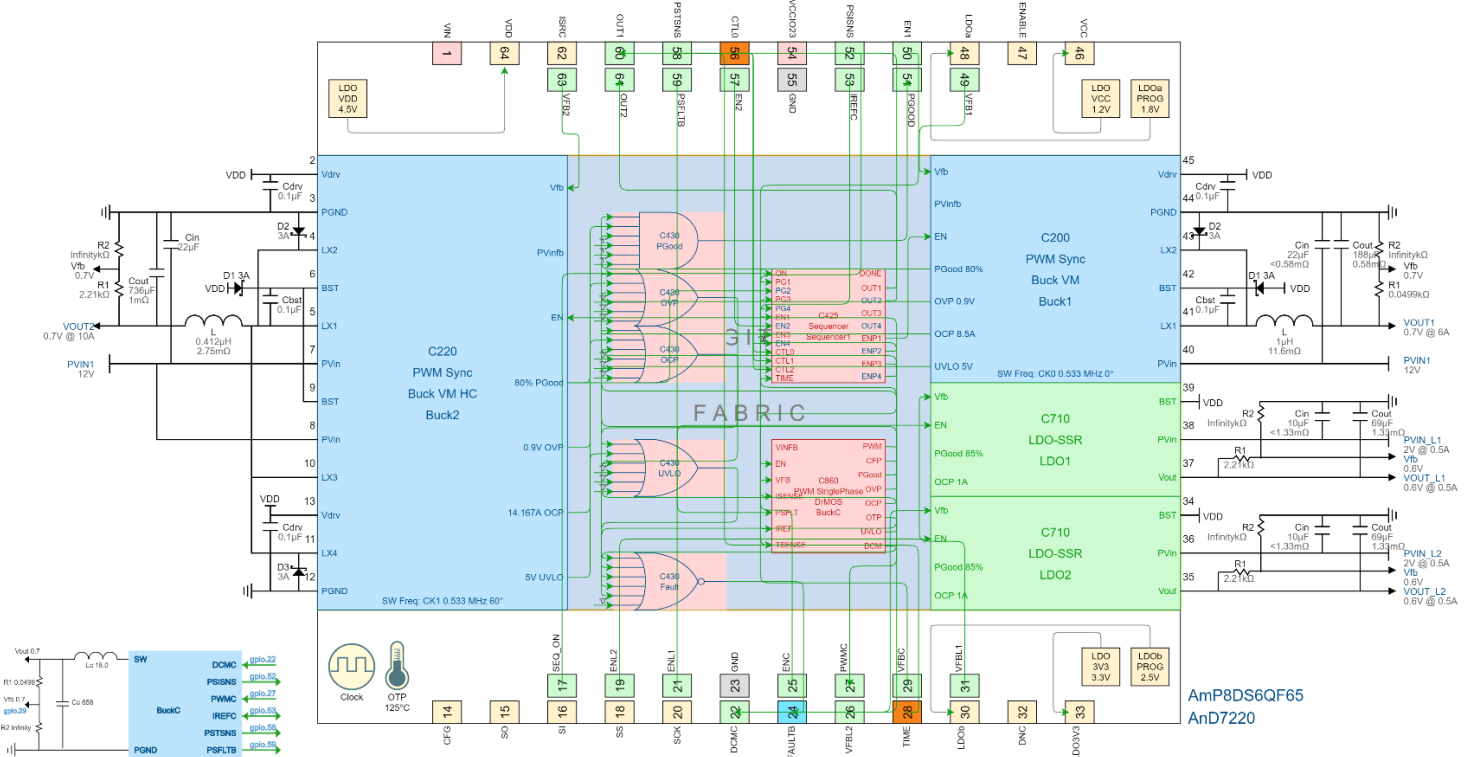

Order Information

Part Number	Package	Description	Availability
AnD7220QF65	QF65	DrMOS Controller, 1A & 6A Synch Buck PMIC	Now

Package Marking Example – QF65

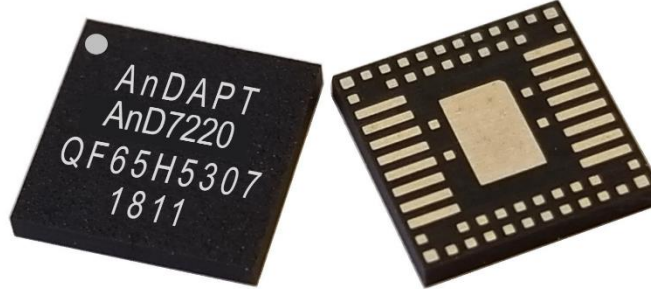

Package Pinout

